

Enceladus Scatterometry Rev 061

R. West

December 29, 2008

- Sequence: s38
- Rev: 061
- Observation Id: en_061_2
- Target Body: Enceladus

1 Introduction

This memo describes one of the Cassini RADAR activities for the s38 sequence of the Saturn Tour. A sequence design memo provides the science context of the scheduled observations, an overview of the pointing design, and guidelines for preparing the RADAR IEB. A 3-hour warmup occurs first using the parameters shown in table 4.

2 CIMS and Division Summary

Each RADAR observation is represented to the project by a set of requests in the Cassini Information Management System (CIMS). The CIMS database contains requests for pointing control, time, and data volume. The CIMS requests show a high-level view of the sequence design.

The CIMS requests form the basis of a pointing design built using the project pointing design tool (PDT). The details of the pointing design are shown by the PDT plots on the corresponding tour sequence web page. (See <https://cassini.jpl.nasa.gov/radar>.) The RADAR pointing sequence is ultimately combined with pointing sequences from other instruments to make a large merged c-kernel. C-kernels are files containing spacecraft attitude data.

A RADAR tool called RADAR Mapping and Sequencing Software (RMSS) reads the merged c-kernel along with other navigation data files, and uses these data to produce a set of instructions for the RADAR observation. The RADAR instructions are called an Instrument Execution Block (IEB). The IEB is produced by running RMSS with a radar config file that controls the process of generating IEB instructions for different segments of time. These segments of time are called divisions with a particular behavior defined by a set of division keywords in the config file. Table 2 shows a summary of the divisions used in this observation. Subsequent sections will show and discuss the keyword selections made for each division. Each division table shows a set of nominal parameters that are determined by the operating mode (eg., distant scatterometry, SAR low-res inbound). The actual division parameters from the config file are also shown, and any meaningful mismatches are flagged.

3 Receive Only Engineering Test Measurements

Div's D,E (see table 5) provides scatt mode, 9 dB attenuator receive only data off and on target for calibration of the scatterometer tone integration data. All of the receive only data is collected in compressed mode to get more integration time. The PRF and number of pulses are chosen to fill the science data buffer. These parameters give the best performance possible from the compressed mode.

CIMS ID	Start	End	Duration	Comments
061OT_WARMUP4EN001_RIDER	2008-072T03:31:12	2008-072T14:36:12	11:05:0.0	Warmup for scatterometry and simultaneous radiometry of icy satellite.
061EN_SCATTRAD001_PRIME	2008-072T14:36:12	2008-072T16:36:12	02:00:0.0	Point -Z axis at target and execute raster scan(s) centered on target. Obtain simultaneous scatterometry and radiometry.
061EN_SCATTRAD002_PRIME	2008-072T20:10:12	2008-072T20:54:12	00:44:0.0	Point -Z axis at target and execute raster scan(s) centered on target. Obtain simultaneous scatterometry and radiometry.

Table 1: en_061_2 CIMS Request Sequence

Division	Name	Start	Duration	Data Vol	Comments
a	distant_warmup	00:00:0.0	03:45:0.0	3.3	Warmup
b	distant_radiometer	03:45:0.0	00:05:30.0	0.3	Off-target radiometer
c	distant_radiometer	03:50:30.0	00:00:30.0	0.9	On/off-target scatt compressed 9 dB calibration
d	scat_compressed	03:51:0.0	00:00:30.0	0.0	On/off-target scatt compressed 9 dB calibration
e	scat_compressed	03:51:30.0	00:10:30.0	2.7	Scatterometer target-center with chirp
f	distant_scatterometer	04:02:0.0	00:10:0.0	120.0	Scatterometer target-center with tone
g	distant_scatterometer	04:12:0.0	00:06:0.0	72.0	On-target radiometry
h	distant_radiometer	04:18:0.0	00:03:0.0	0.2	
Total				199.5	

Table 2: Division summary. Data volumes (Mbits) are estimated from maximum data rate and division duration.

Div	Alt (km)	Slant range (km)	B3 Size (target dia)	B3 Dop. Spread (Hz)
a	131258	131258	1.71	602
b	58798	off target	0.77	off target
c	63437	off target	0.83	off target
d	63857	off target	0.83	off target
e	64278	off target	0.84	off target
f	73070	73071	0.95	629
g	81367	81368	1.06	705
h	86306	86306	1.12	751

Table 3: Division geometry summary. Values are computed at the start of each division. B3 Doppler spread is for two-way 3-dB pattern. B3 size is the one-way 3-dB beamwidth

Name	Nominal	Actual	Mismatch	Comments
mode	radiometer	radiometer	no	
start_time (min)	varies	0.0	no	
end_time (min)	varies	225.0	no	
time_step (s)	varies	3600.0	no	Used by radiometer only modes - saves commands
bem	00100	11111	yes	
baq	don't care	5	no	
csr	6	6	no	6 - Radiometer Only Mode
noise_bit_setting	don't care	4.0	no	
dutycycle	don't care	0.38	no	
prf (Hz)	don't care	1000	no	
tro	don't care	0	no	
number_of_pulses	don't care	8	no	
n_bursts_in_flight	don't care	1	no	
percent_of_BW	don't care	100.0	no	
auto_rad	on	on	no	
rip (ms)	34.0	34.0	no	
max_data_rate	0.248	0.248	no	Kbps - set for slowest burst period
interleave_flag	off	off	no	
interleave_duration (min)	don't care	10.0	no	

Table 4: en_061_2 Div a distant_warmup block

Name	Nominal	d	e	Mismatch	Comments
mode	scat_compressed	radiometer	scat_compressed	yes	
start_time (min)	varies	231.0	231.5	no	
end_time (min)	varies	231.5	242.0	no	
time_step (s)	don't care	10.0	30.0	no	Set by valid time calculation
bem	00100	00100	00100	no	
baq	3	5	3	yes	3 - PRI summation
csr	1	6	1	yes	1 - receive only antenna measurement
noise_bit_setting	4.0	4.0	4.0	no	9 dB setting used by all low SNR scatterometry
dutycycle	don't care	0.38	0.38	no	
prf (Hz)	1200	1000	1200	yes	
tro	don't care	0	6	no	automatically set to 6
number_of_pulses	150	8	150	yes	Set with the PRF to fill the science data buffer - Only 2 PRI's worth of data are downlinked.
n_bursts_in_flight	1	1	1	no	
percent_of_BW	don't care	100.0	0.0	no	
auto_rad	on	on	on	no	
rip (ms)	34.0	34.0	34.0	no	
max_data_rate	4.300	0.992	4.300	yes	
interleave_flag	off	off	off	no	
interleave_duration (min)	don't care	10.0	10.0	no	

Table 5: en_061_2 Div de scat_compressed block

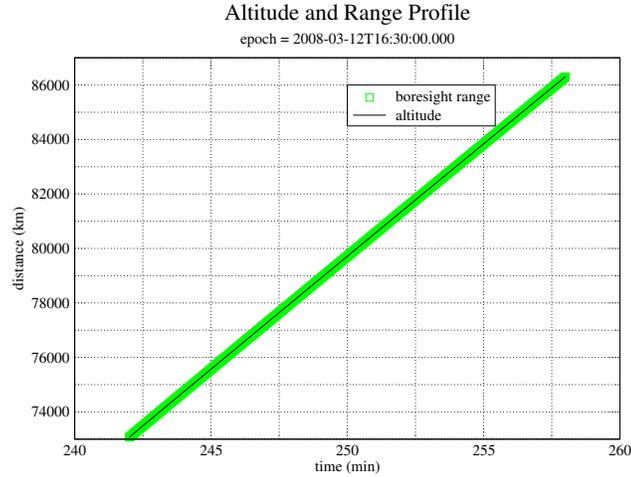


Figure 1: Div F,G: Altitude and range to the boresight point

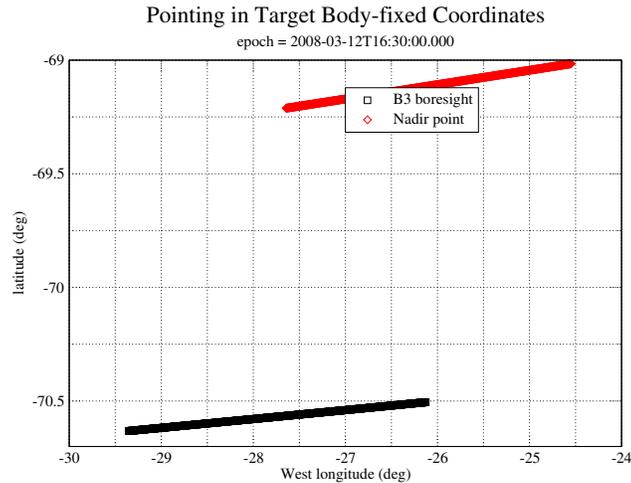


Figure 2: Div F,G: Stare in target body-fixed coordinates

4 Div's F,G: Enceladus Scatterometry

Figures 1 and 2 show the pointing design for the scatterometry stare from the merged kernel. The angular size of the target is about 7.7 mrad during this division. The beam 3 beamwidth is 6 mrad. The division parameters for the tone and chirp target integrations are shown in table 6.

4.1 Scatterometer Performance

The detection performance is shown in figures 3, 4, and 5. The maximum doppler spread in Div f is 705 Hz which comes from rotation and spacecraft motion. In this chirped division, the PRF needs to be higher than the doppler spread to support potential range-doppler processing, and is set by division parameter to 800 Hz. With this PRF, the range ambiguity spacing is 187 km while Enceladus is 249 km in radius. The range-spread of the beam depends on where it is pointed. For target centered pointing the cosine law can be applied to solve the geometry. At 73070 km range, the range-spread is 140 km.

Figure 5 shows that range processing is marginally possible. The PRF is set to 800 to move range ambiguities out to the edge of the two-way beam pattern. Doppler ambiguities will intrude and reduce the ambiguity free region to a

Name	Nominal	f	g	Mismatch	Comments
mode	scatterometer	scatterometer	scatterometer	no	
start_time (min)	varies	242.0	252.0	no	
end_time (min)	varies	252.0	258.0	no	
time_step (s)	don't care	30.0	30.0	no	Used when BIF > 1, otherwise set by valid time calculation
bem	00100	00100	00100	no	
baq	5	5	5	no	
csr	0	0	0	no	0 - normal operation with fixed attenuator set to match Phoebe for easier cross-calibration
noise_bit_setting	4.0	4.0	4.0	no	Scat signal set higher than ALT/SAR
dutycycle	0.70	0.60	0.70	yes	
prf (Hz)	varies	800	1302	no	Set to cover doppler spread and to allow CSF = integer multiple
tro	6	6	6	no	6 - allows for some noise only data in time domain
number_of_pulses	varies	58	90	no	depends on PRF choice (can have more shorter pulses)
n_bursts_in_flight	varies	1	1	no	Used to increase PRF and data rate at long range
percent_of_BW	0.0	100.0	0.0	yes	
auto_rad	on	on	on	no	
rip (ms)	34.0	34.0	34.0	no	
max_data_rate	200.000	200.000	200.000	no	Kbps - determines burst period
interleave_flag	off	off	off	no	
interleave_duration (min)	don't care	10.0	10.0	no	

Table 6: en_061_2 Div fg distant_scatterometer block

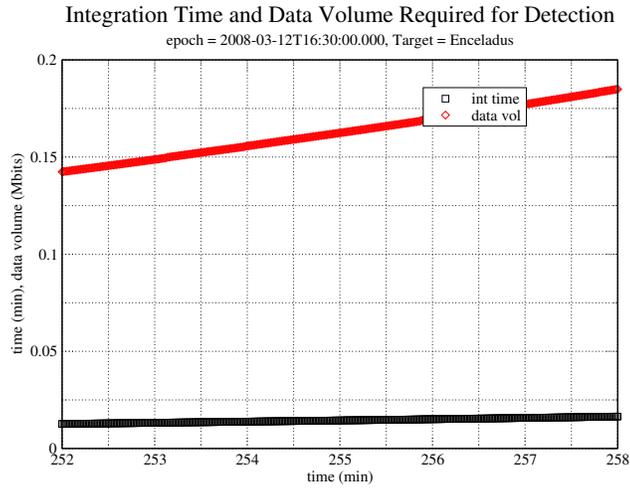


Figure 3: Scatterometry Div's G: Detection integration time required for a single point detection using optimal chirp bandwidth

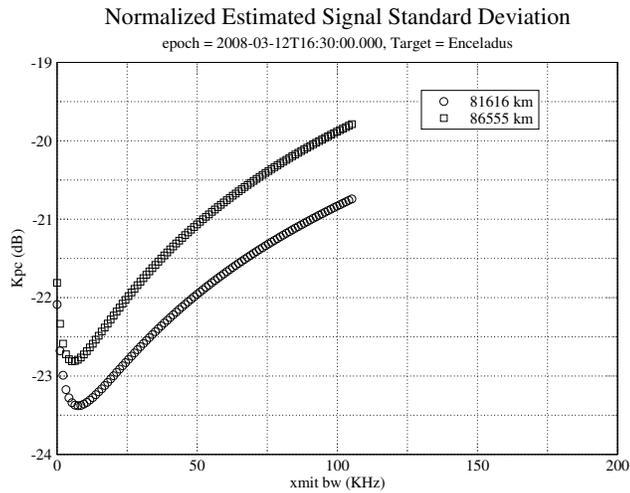


Figure 4: Div's G: Normalized estimated signal standard deviation for a disk integrated observation using optimal chirp bandwidth and assuming all the bursts occur at minimum range, and 15 minutes away from minimum range.

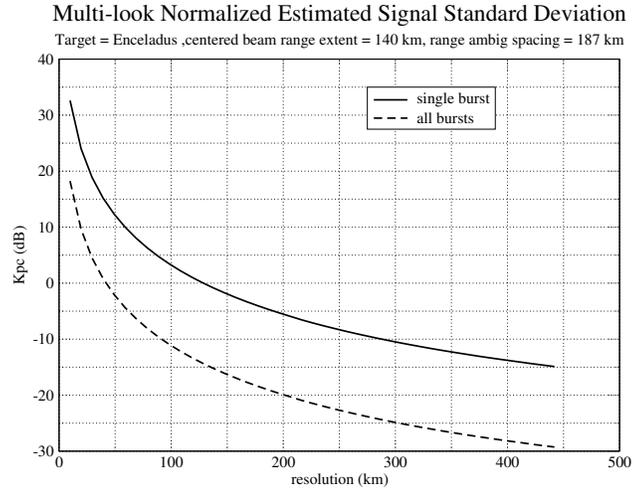


Figure 5: Div F: Normalized estimated signal standard deviation for a range/doppler cell as a function of resolution. Range/doppler resolution elements are both set equal to the specified resolution. Results are shown for a single burst, and for all the bursts in this division. Calculations are performed using the geometry at the start of the division. The presence of ambiguities are not shown.

truncated annular region. Disk integrated results from the tone division (Div g) should be very stable. The PRF in the tone division is set to 1302 Hz to cover the doppler spread and to avoid splitting the main lobe of the spectrum.

5 Revision History

1. Feb 13, 2008: Initial Release
2. Dec 29, 2008: Updated for PDS

6 Acronym List

ALT	Altimeter - one of the radar operating modes
BAQ	Block Adaptive Quantizer
CIMS	Cassini Information Management System - a database of observations
Ckernel	NAIF kernel file containing attitude data
DLAP	Desired Look Angle Profile - spacecraft pointing profile designed for optimal SAR performance
ESS	Energy Storage System - capacitor bank used by RADAR to store transmit energy
IEB	Instrument Execution Block - instructions for the instrument
ISS	Imaging Science Subsystem
IVD	Inertial Vector Description - attitude vector data
IVP	Inertial Vector Propagator - spacecraft software, part of attitude control system
INMS	Inertial Neutral Mass Spectrometer - one of the instruments
NAIF	Navigation and Ancillary Information Facility
ORS	Optical Remote Sensing instruments
PDT	Pointing Design Tool
PRI	Pulse Repetition Interval
PRF	Pulse Repetition Frequency
RMSS	Radar Mapping Sequencing Software - produces radar IEB's
SAR	Synthetic Aperture Radar - radar imaging mode
SNR	Signal to Noise Ratio
SOP	Science Operations Plan - detailed sequence design
SOPUD	Science Operations Plan Update - phase of sequencing when SOP is updated prior to actual sequencing
SSG	SubSequence Generation - spacecraft/instrument commands are produced
SPICE	Spacecraft, Instrument, C-kernel handling software - supplied by NAIF to use NAIF kernel files.
TRO	Transmit Receive Offset - round trip delay time in units of PRI